



TUFF COSHH Cupboard H1800 x W900 x D460mm

Label



Warning Labels Supplied

FEATURES

Brief Description

The TUFF hazardous COSHH cupboards are designed to store hazardous substances safely and securely. Ensuring employers and employees are conforming to COSHH regulations.

Specifications

- Fully COSHH Compliant
- 2-Point Locking System
- 2 Keys Per Lock Supplied
- Galvanised Shelving
- Germ Guard Technology
- Fitted with an Integral Sump
- Delivered Assembled
- Door stiffener is spot welded with butt hinges



2 Point Locking System - Supplied with Keys



14 Litre Sump Capacity



Adjustable Spill Retaining Galvanised Shelf


Classifications

- Fire Guard Tested and Certified to EN 13501-1. Reaction to Fire Classification A2-s2, d0 EN 13501-1:2007 + A1:2009
- DSEAR and HSG51 compliant hazardous storage cabinet
- Hazardous Label complies with GHS, CLP, IMDG/IMO, AND & ICAO/IATA requirements
- Most common hazard classes: Chemicals, Flammables, Vapours, Fumes, Dusts, Mists, Corrosives, Toxics, Irritants, Gases, and Biological Agents

Carcass & Door Paint Finishes


- Three stage pre-treatment and phosphate coating
- Bright Truflow Yellow powder coated paint finish for high visibility
- Carcass and doors are powder coated with one coat of epoxy polyester full gloss powder
- Germ Guard Active Technology Paint has an anti-bacterial powder coated finish, effective against MRSA and E-Coli

External Dimensions

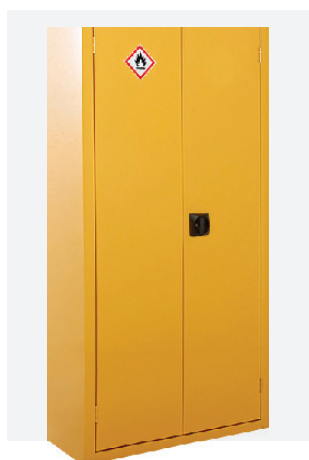

| | |
|------------------|--------------------|
| Height | 1800mm |
| Width | 900mm |
| Depth | 460mm |
| Model SKU | 34021065 |
| Shelves | 3 |
| Capacity | 50kg Per Shelf/UDL |
| Sump Capacity | 14 Litres |
| Open Entry H x W | 1600 x 775mm |

Internal Dimensions

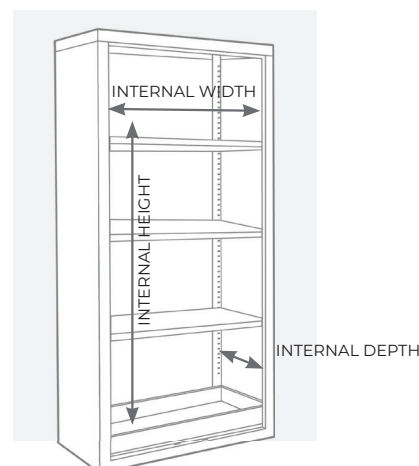

| | |
|------------------|--------------------|
| Height | 1798mm |
| Width | 896mm |
| Depth | 435mm |
| Model SKU | 34021065 |
| Shelves | 3 |
| Capacity | 50kg Per Shelf/UDL |
| Sump Capacity | 14 Litres |
| Open Entry H x W | 1600 x 775mm |

Cupboard Door Construction

- Door aperture has return bends to eliminate open gaps
- Fitted with an integral sump at the bottom for handling spills through the use of absorbents with a 14 litre capacity
- Body material: 0.7mm mild steel pop riveted
- Sump material: 1.2mm steel with fully welded integral seams

Cleaning & Maintenance

- Clean paint work at regular intervals with warm soapy water or foaming cleanser
- Clean oil hinges and lock sparingly when required using a light oil

Additional Features

- Replacement locks available
- Spill retaining adjustable galvanised shelves
- Extra shelves available for all floor cabinet sizes
- Galvanised spill retaining shelves
- 2-Point Locking System, comes with 2 keys per lock

Optional Extras

- Chemical Absorbent Pads
- Spill Kits (Universal, Oil, Chemical)
- Drip Trays
- Leak Diverters
- Spill Pallets