



TUFF COSHH Cupboard H1800 x W900 x D460mm

## Label



Warning Labels Supplied

## FEATURES

### Brief Description

The TUFF hazardous COSHH cupboards are designed to store hazardous substances safely and securely. Ensuring employers and employees are conforming to COSHH regulations.

### Specifications

- Fully COSHH Compliant
- 2-Point Locking System
- 2 Keys Per Lock Supplied
- Galvanised Shelving
- Germ Guard Technology
- Fitted with an Integral Sump
- Delivered Assembled
- Door stiffener is spot welded with butt hinges



2 Point Locking System - Supplied with Keys



14 Litre Sump Capacity



Adjustable Spill Retaining Galvanised Shelf

## Classifications

- Fire Guard Tested and Certified to EN 13501-1. Reaction to Fire Classification A2-s2, d0 EN 13501-1:2007 + A1:2009
- DSEAR and HSG51 compliant hazardous storage cabinet
- Hazardous Label complies with GHS, CLP, IMDG/IMO, AND & ICAO/IATA requirements
- Most common hazard classes: Chemicals, Flammables, Vapours, Fumes, Dusts, Mists, Corrosives, Toxics, Irritants, Gases, and Biological Agents

## Carcass & Door Paint Finishes


- Three stage pre-treatment and phosphate coating
- Bright Truflow Yellow powder coated paint finish for high visibility
- Carcass and doors are powder coated with one coat of epoxy polyester full gloss powder
- Germ Guard Active Technology Paint has an anti-bacterial powder coated finish, effective against MRSA and E-Coli

## External Dimensions



Height	900mm
Width	900mm
Depth	460mm
Model SKU	34021064
Shelves	1
Capacity	50kg Per Shelf/UDL
Sump Capacity	14 Litres
Open Entry H x W	700 x 775mm

## Internal Dimensions

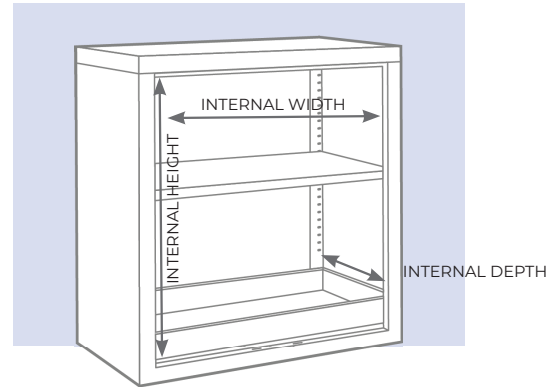

Height	898mm
Width	896mm
Depth	435mm
Model SKU	34021064
Shelves	1
Capacity	50kg Per Shelf/UDL
Sump Capacity	14 Litres
Open Entry H x W	700 x 775mm

### Cupboard Door Construction

- Door aperture has return bends to eliminate open gaps
- Fitted with an integral sump at the bottom for handling spills through the use of absorbents with a 14 litre capacity
- Body material: 0.7mm mild steel pop riveted
- Sump material: 1.2mm steel with fully welded integral seams

### Cleaning & Maintenance

- Clean paint work at regular intervals with warm soapy water or foaming cleanser
- Clean oil hinges and lock sparingly when required using a light oil

### Additional Features

- Replacement locks available
- Spill retaining adjustable galvanised shelves
- Extra shelves available for all floor cabinet sizes
- Galvanised spill retaining shelves
- 2-Point Locking System, comes with 2 keys per lock

### Optional Extras

- Chemical Absorbent Pads
- Spill Kits (Universal, Oil, Chemical)
- Drip Trays
- Leak Diverters
- Spill Pallets